


100kVA Soundproof Generator

Features

- ☛ Stage IIIA
- ☛ 50 Hz/60 Hz Selector Switch
- ☛ Noise Level @ 1m, 73dBA (@7m, 61dBA)
- ☛ Autostart DSE CP with MCCB
- ☛ VELCB
- ☛ Micro Switch Protection over Buss Bar Door
- ☛ Oil Extraction Pump
- ☛ 3 Way Fuel Valve
- ☛ Battery Isolator
- ☛ Water Separator Std
- ☛ Cental Lifting Hook
- ☛ Fork Lift Pockets
- ☛ Fully Bunded - c/w bund alarm
- ☛ Remote Telemetry - c/w External Fuel Level Monitoring
- ☛ Bulk Fuel Tank Connectors
- ☛ Battery Charger

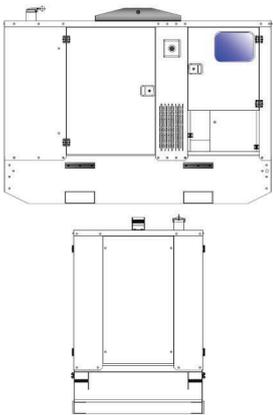

Generating Set	50 Hz	60 Hz
Continuous Power	100 kVA	120 kVA
Standby Power	110 kVA	132 kVA
Noise Level @ 1m / 7m	75 dBA / 63 dBA	
Continuous Power	80 kWe 1	100 kWe
Standby Power	88 kWe	110 kWe
Amps 3 Phase	139 A	
Fuel consumption 70% load	15.6 l/h	18.8 l/h

Engine	1500 rpm
Model	NEF4STM2A
Continuous Power	88 kWm
Standby Power	96.8 kWm
Aspiration	Turbocharged
Cooling System	Water
Speed Governor	Electronic
Cylinder Number	4
Displacement	4,500 cm ³

Logistic Information	GX111F
Fuel Tank	180 ltr
Weight (Wet)	2,000 kg
Dimensions (L x W x H)	255 x 110 x 174 cm

Control Panel	Deep Sea 7510
Auto Start	Standard

CES Power has a policy of continuous improvement and therefore reserve the right to change the specification without prior notice.

