


60kVA Soundproof Generator

Features

- Stage IIIA
- Noise Level @ 1m, 73dBA (@7m, 61dBA)
- Autostart DSE CP with MCCB
- VELCB
- Micro Switch Protection over Buss Bar Door
- Oil Extraction Pump
- 3 Way Fuel Valve
- Battery Isolator
- Water Separator Std
- Central Lifting Hook
- Fork Lift Pockets
- Fully Bunded - c/w bund alarm
- Remote Telemetry - c/w External Fuel Level Monitoring
- Bulk Fuel Tank Connectors
- Battery Charger

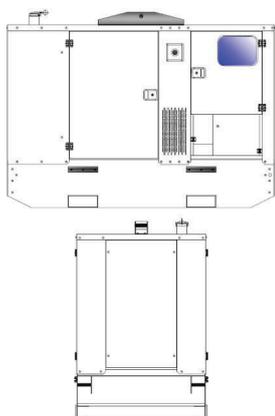

Generating Set		50 Hz
Continuous Power		60 kVA
Standby Power		66 kVA
Noise Level @ 1m / 7m		74 dBA / 62 dBA
Power Factor		cos ! 0.8
Continuous Power		48 kWe
Standby Power		53 kWe
Amps 3 Phase		83 A
Fuel consumption 70% load		10.6 l/h
Engine		1500 rpm
Model		NEF45SMIA
Continuous Power		53 kWm
Standby Power		59 kWm
Aspiration		Turbocharged
Cooling System		Water
Speed Governor		Mechanical
Cylinder Number		4
Displacement		4,500 cm ³
Logistic Information		GX72F
Fuel Tank		185 ltr
Weight (Wet)		1,755 kg
Dimensions (L x W x H)		228 x 110 x 167 cm
Control Panel		DSE 7310
Auto Start		Standard

CES Power has a policy of continuous improvement and therefore reserve the right to change the specification without prior notice.

