

20kVA Soundproof Generator

Features

- ☛ Noise Level @ 1m, 75dBA (@7m, 63dBA)
- ☛ Autostart DSE CP with MCCB
- ☛ VELCB
- ☛ Micro Switch Protection over Buss Bar Door
- ☛ Oil Extraction Pump
- ☛ 3 Way Fuel Valve
- ☛ Battery Isolator
- ☛ Water Separator Std
- ☛ Cental Lifting Hook
- ☛ Fork Lift Pockets
- ☛ Fully Bunded - c/w bund alarm
- ☛ Remote Telemetry - c/w external fuel level monitoring


Options

- ☛ Bulk Fuel Tank
- ☛ Battery Charger

Generating Set		50 Hz
Continuous Power		20 kVA
Standby Power		22 kVA
Noise Level @ 1m / 7m		73 dBA / 61 dBA
Power Factor		cos ! 0.8
Continuous Power		16 kWe
Standby Power		18 kWe
Amps 3 Phase		27 A
Fuel consumption 70% load		3.8 l/h
Engine		1500 rpm
Model		Perkins 404D-22G
Continuous Power		18.5 kWm
Standby Power		20 kWm
Aspiration		Turbocharged
Cooling System		Water
Speed Governor		Mechanical
Cylinder Number		4
Displacement		2,216 cm ³
Logistic Information		GX22P
Fuel Tank		75 ltr
Weight (Wet)		670 kg
Dimensions (L x W x H)		150 x 80 x 133 cm
Control Panel		DSE 7310
Manual Start		Standard

CES Power has a policy of continuous improvement and therefore reserve the right to change the specification without prior notice.

20kVA Soundproof Generator

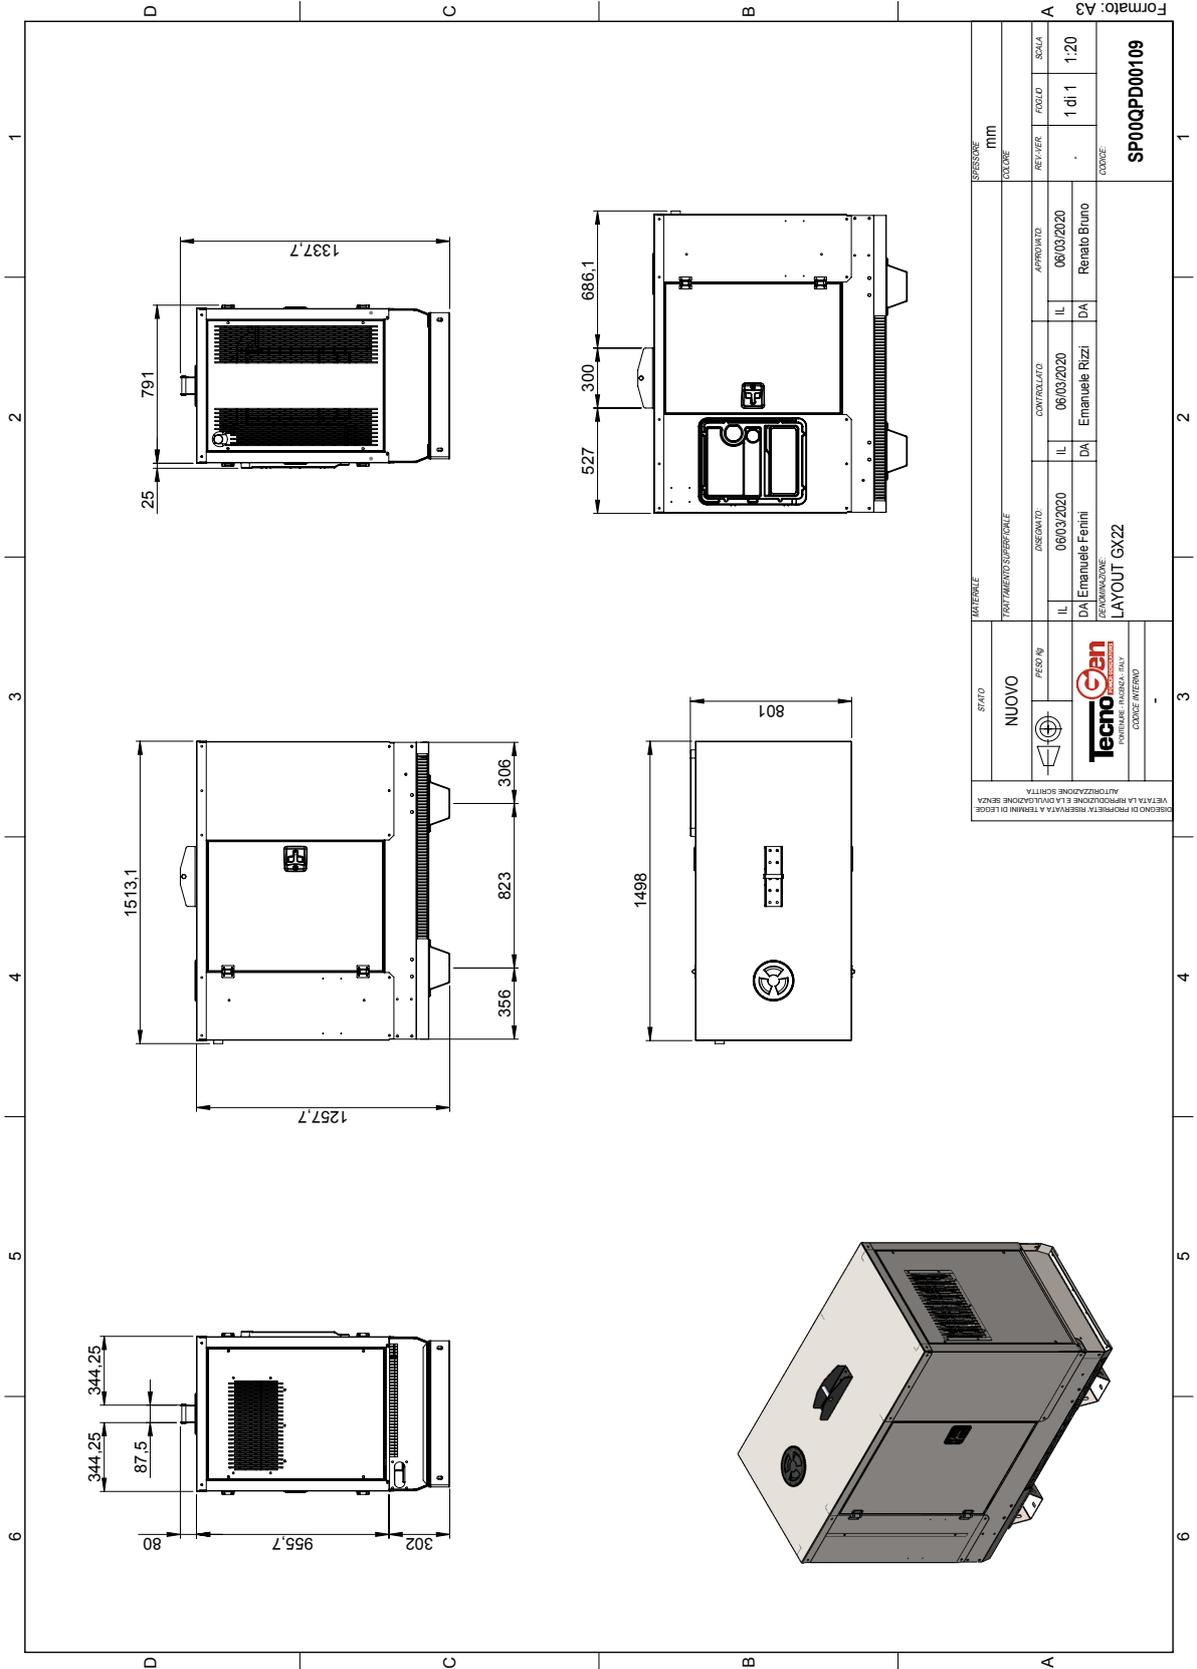

CES Power has a policy of continuous improvement and therefore reserve the right to change the specification without prior notice.